


KVM-1200MA

8 or 16 PCs

Esis Pty Ltd
02 9481 7420

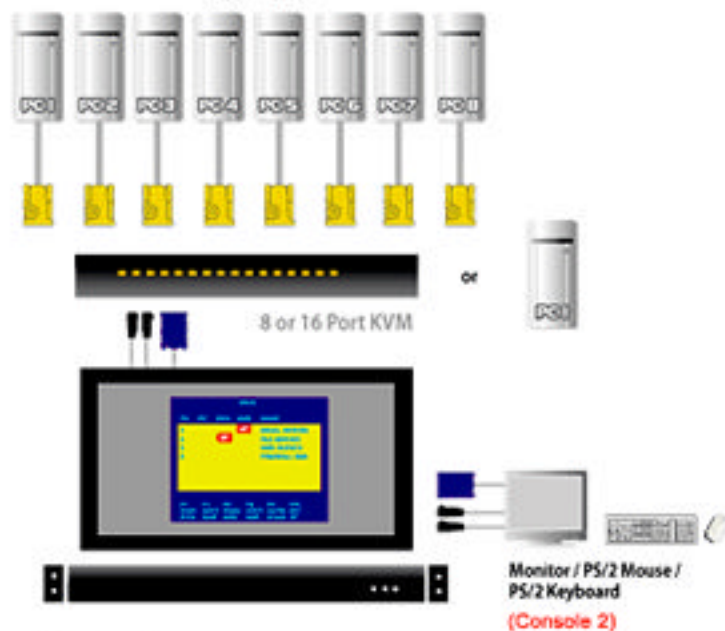

Specifications

Connectors	Second Console	Keyboard	1 x Min Din-6 Female (Purple)
		Mouse	1 x Min Din-6 Female (Green)
		Video	1 x HDB-15 Female (Blue)
	Computer	Keyboard/Video/Mouse	1 x SPHD-15 Female (Yellow)
	Power		3 prong AC Socket
Switches	LCM Adjustment		4 x Buttons
	KM Reset		1 x Semi-Recessed Pushbutton
	Power		1 x Rocker Switch
LEDs	Power		1 (Blue)
	Num Lock		1 x (Green)
	Caps Lock		1 x (Green)
	Scroll Lock		1 x (Green)
Emulation	Keyboard		PS/2
	Mouse		
Video	15" LCD		1024 x 768; DDC2B
	17" LCD		1280 x 1024; DDC2B
I/P Rating			100 ~ 240 VAC; 50/60 Hz; 1A
Power Consumption	15" LCD		120V,16W / 230V,19W
	17" LCD		120V,27W / 230V,35W
Environment	Operating Temperature		0°~40°C
	Storage Temperature		-20°~60°C
	Humidity		0~80% RH, NC
Physical Properties	Housing		Metal
	Weight	15" LCD	13.2kg
		17" LCD	13.7kg
	Dimensions (L x W x H)		52 x 48 x 4.4cm (19"-1U)