




Esis Pty Ltd www.esis.com.au

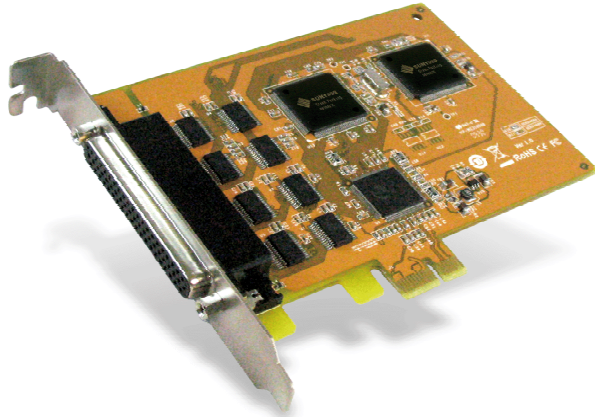

SER5466A or APCIE-8S

8-port RS-232 PCI Express
Serial Board



Introduction

SUNIX SER5466A, PCI Express serial communication boards meet the PCI Express Base Specification Revision 1.1. It is compatible with PCI Express x1, x2, x4, x8 and x16 lane Bus. The majorities of today's motherboards is not equipped with serial ports or only have one serial port. With SUNIX PCI Express serial board, users can add eight serial ports to their system, allowing them to use serial devices further. SUNIX SER5466A card has 128-bytes onboard FIFO buffer and compatible with 16C950 UART specification. It is designed with SUNIX UART controller, SUN1999 and as well built with many of SUNIX advanced features and technologies, making it the best solution for commercial and industrial automation applications.

Features

- Expands 8 independent RS-232 serial ports with communication speeds up to 115.2Kbps.
- High speed SUN1999 16C950 compatible UART controller on-board.
- Designed to meet PCI Express Base Specification Revision 1.1.
- Supports x1, x2, x4, x8, x16 (lane) PCI Express Bus connector keys.
- On-chip hardware auto flow control to guarantee no data loss.
- Built-in ± 15 KV ESD protection for all serial signals meets IEC1000-4-2 standard.
- Plug-n-Play, I/O address and IRQ assigned by BIOS.
- Certified by CE, FCC, RoHS, and Microsoft WHQL approval.
- Support Microsoft Windows, Linux, and DOS.



Specifications

Serial Communication

Interface	RS-232	Signal	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Controller	SUNIX SUN1999 (16C950 UART Compatible)	Baud rate	50bps ~115.2Kbps
BUS	PCI Express one lane (x1)	Stop bit	1, 1.5, 2
No. of Port	8-port	Parity	even, odd, none, mark, space
IRQ & IO	Assigned by System	Flow Control	None, Xon/Xoff, RTS/CTS
FIFO	128byte Hardware	PCB Connector	DB62 Female
Protection	±15KV ESD protection for each signal Human Body Model (HBM) ±15KV IEC1000-4-2 Air Gap Discharge ±8KV IEC1000-4-2 Contact Discharge		

Driver Support

Microsoft Client	Windows XP/Vista/7 (X86/X64)
Microsoft Server	Windows 2000/2003/2008 (X86/X64)
Microsoft Embedded	Windows CE5.0/6.0/XP Embedded/POS Ready 2009/Embedded System 2009
Linux	Linux 2.4.x/2.6.x
DOS	DOS
FreeBSD	FreeBSD 5.3~5.5 / 6.0~6.4
QNX	QNX 6.3.2/6.4.0
* IBM OS/2	WARP 3/WARP 4
* SCO UnixWare	UnixWare 7.1.3/7.1.4/ Open Server 5.0.7/6.0
* Sun Microsystems	Solaris 10
Note : " * " Supported by special inquiry.	

Regulatory Approvals

Hardware	EN55022 Class B, EN55024, EN61000-3-2, EN61000-3-3, FCC Part 15 Class B, BSMI: CNS13438, C-Tick: CISPR22 AS/NZS, RoHS
Software	Microsoft WHQL Windows <input type="checkbox"/> Microsoft Client: XP/Vista/7 (X86/X64) <input type="checkbox"/> Microsoft Server: 2000/2003/2008 (X86/X64)

Environment


Operation Temperature	0 to 60°C (32 to 140°F)
Operation Humidity	5 to 95% RH
Storage Temperature	-20 to 85°C (-4 to 185°F)

Dimension

PCB Dimension	127 x 98 mm
Bracket	Standard 121 mm
Bracket Space	1




Application

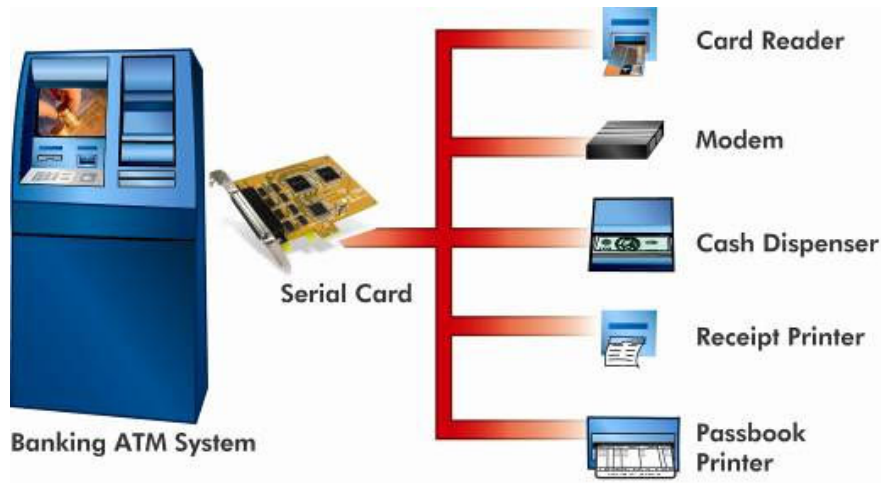

Mechanical Drawings (Unit = mm)



Pin Assignment

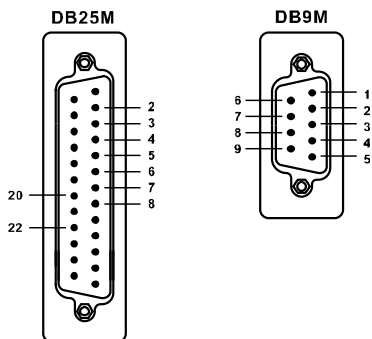

PIN	DB9M	DB25M
DCD	1	8
RxD	2	3
TxD	3	2
DTR	4	20
GND	5	7
DSR	6	6
RTS	7	4
CTS	8	5



Packing List

Packing Content

- SER5466A – 8-port RS-232 PCI Express Serial Board
- Quick Installation Guide
- Software CD ROM
- DB62 to 8-port DB9/DB25 Male Connection Cable, 40 cm



Optional Accessories

- DB62 to 8-port DB9 Male Connection Cable, 40/100 cm

Part Number: 1WDB-62M04009D8000



- DB62 to 8-port DB25 Male Connection Cable, 40/100 cm

Part Number: 1WDB-62M04025D800A



