

The Digital View ACG-1024 interface controller for OEM monitor and packaged LCD solutions.

Panels: 1024x768, 800x600, 640x480 TFT colour LCD

Input: Analog XGA, SVGA, VGA

The ACG-1024 is a multi-sync interface providing direct analog connection for a wide range of TFT LCD panels with a resolution of 1024x768, 800x600, 640x480. It allows full screen expansion of lower resolution image onto a higher resolution panel. The ACG-1024 is a compact high performance single board solution.

Key features of Digital View flat panel interface controllers include excellent picture quality, ease of use, extensive features and cost effective performance.



XGA

SVGA

VGA

Features

- **Panel Connectivity:** Designed for VGA,SVGA, XGA resolution TFT panels.
- **Input signals:** Analog XGA SVGA, VGA, with separate sync.Vertical refresh rate up to 75Hz at XGA resolutions.
- **Computer graphics modes:** XGA ,SVGA, VGA mode. Non-interlaced.
- **Panel power:** 3.3V & 5V
- **Panel signal:** TTL, LVDS & TMDS option (Add-on board)
- **Colors:** Up to 8 bit per colour, ie 16.7 million colors (even on 3 x 6 bit panels).
- **Functions display:** On Screen Display (OSD) of functions
- **Functions control:** Buttons
- **Image control:** Brightness, Contrast, RGB adjust, Image position, Image horizontal size, Auto setup, Auto Balance, Auto Center, Auto phase, Phase
- **Other features:** System Information, OSD timeout, OSD position, Color temperature, Load factory default.
- **Multi-language:** 2 languages (English or French) option for OSD menu display.
- **Dimensions:** 107mm x 92mm (4.2" x 3.6") approx.
- **Mounting holes & layout:** Digital View standard.
- **Connectors:** Embedded & external type.
- **Power requirements:** 12V DC.
- **Power saving:** VESA DPMS compatible.
- **Inverter support:** 5 & 12V, Enable pin.
- **Plug & Play:** DDC 1, 2/b compatible
- **Status indicator:** Dual colour LED support.

Panel Compatibility Guide

Ref	Panel type
LG	TFT
Sharp	TFT
Samsung	TFT
Fujitsu	TFT
Hyundai	TFT
LG	TFT
Mitsubishi	TFT
Sharp	TFT
BIOS need to change to support different panel resolution.	


Order Information

Item	Description
1	ACG-1024 controller
2	Panel signal cable & connector kit
3	Backlight inverter & cables kit
4	Function controls & cables kit
5	Status LED kit
6	PC to controller graphics cable
7	AC/DC adapter with +12V DC output
8	LVDS, TMDS interface options

Support for the above panels (and more as they become available) is being introduced progressively, please check at time of placing order for specific compatibility.

Connection for VGA, SVGA, XGA resolution TFT type LCD panels

Consistent mounting holes, connector types and general layout with other Digital View controllers

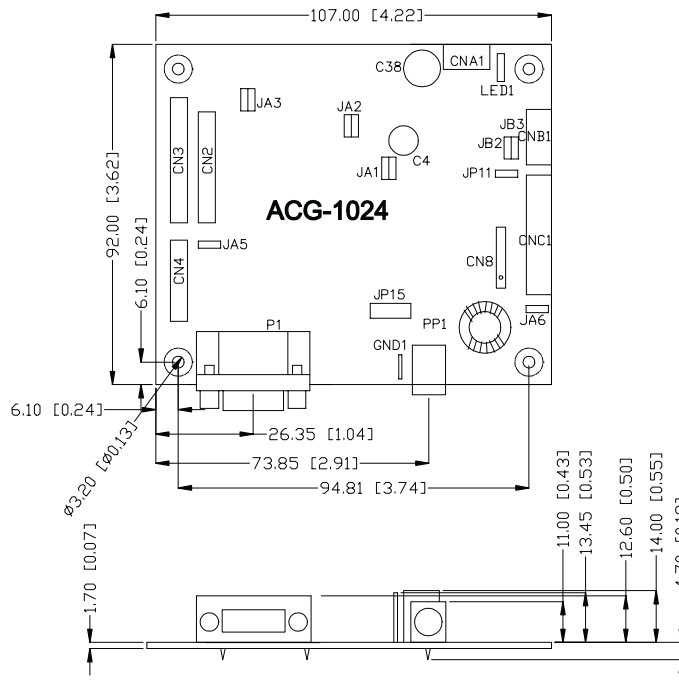

Connection for panel backlight inverters.

User buttons control options

Input connectors for both embedded and external type connection.

Connector reference

CNA1	Auxiliary power output: JST B4B-XH-A	LED1	Dual colour status LED: 3-pin header
CNB1	Backlight inverter: JST B5B-XH-A	P1	15 way VGA signal input
CN2	Panel signal: Hirose DF11-28DP-2DSA	PP1	Power input: 5.5mm jack for 12V supply
CN3	Panel signal: Hirose DF11-32DP-2DSA		
CN4	Panel signal: Hirose DF11-20DP-2DSA		
CN8	Pin Header 6x1 (Reserved for factory use)		
CNC1	Function controls: JST B12B-XH-A		

Notes:

- Dimensions are in mm.
- PCB mounting holes connect to ground.
- PCB mounting holes are 3.2mm.
- Other mounting holes for inverter are not grounded.
- Drawing is not to scale.

ASIA

Digital View Ltd
2201 Nanyang Plaza
57 Hung To Rd, Kwun Tong,
Kowloon, Hong Kong

Tel: (852) 2861 3615
Fax: (852) 2520 2987
Email: sales@digitalview.com.hk

USA

Digital View Inc
18440 Technology Drive,
Building 130, Morgan Hill,
California, CA95037, USA.

Tel: (1) 408-782 7773
Fax: (1) 408-782 7883
Email: sales@digitalview.com

EUROPE

Digital View Ltd
Millennium Studios,
5 Elstree Way, Borehamwood,
Herts, WD6 1SF, England

Tel: (44) (0)181-236 1112
Fax: (44) (0)181-236 1116
Email: sales@digitalview.co.uk

Please visit our Web site for more information: www.digitalview.com