


AIMB-280

Intel® Core™ i7/i5/i3/Pentium® LGA1156 Mini-ITX with VGA/DVI, 2 COM, Dual LAN, PCIe x16

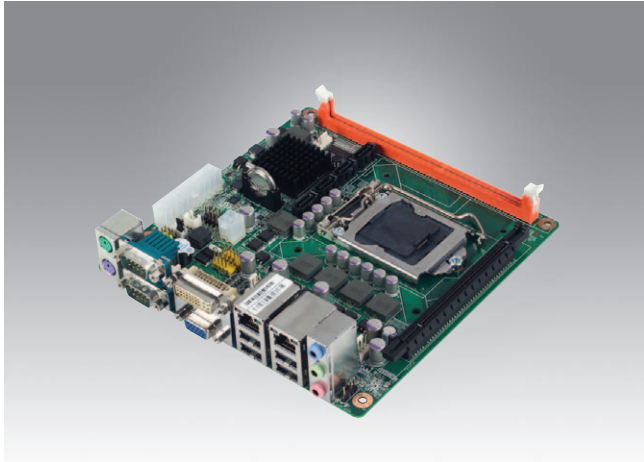

Features

- Supports Intel® Core™ i7/i5/i3/Pentium® processor with Q57 chipset
- One DIMM socket supports up to 4 GB DDR3 800/1066/1333 MHz SDRAM
- Supports dual display, VGA and DVI, and dual GbE LAN
- Supports 2 COM, 8 USB, and 4 SATA ports
- Supports embedded software APIs and Utilities

Software APIs:

- SMBus
- H/W Monitor
- Watchdog

Utilities:

- BIOS flash
- eSOS
- Monitoring
- Embedded Security ID

Note: eSOS requires ODM BIOS, available by request


Specifications

	CPU	Core i7	Core i5 700	Core i5 600	Core i3	Pentium	
Processor System	Max. Speed	4	4	2	2	2	
	Max. speed	2.93 GHz	2.66 GHz	3.3 GHz	3.06 GHz	2.8 GHz	
	Integrated Graphics	No	No	Yes	Yes	Yes	
	L3 Cache	8 MB	8 MB	4 MB	4 MB	3 MB	
	Chipset	Q57					
	BIOS	AMI 64 Mbit SPI					
Expansion Slot	PCI	-					
	Mini-PCI	-					
	PCIe x16 (Gen2)	8 GB/s per direction, 1 slot					
Memory	Technology	DDR3 800/1066/1333 MHz SDRAM					
	Max. Capacity	4 GB					
	Socket	1 x 240-pin DIMM					
Graphics	Controller	Intel HD Graphics					
	VRAM	1 GB maximum shared memory with 2 GB and above system memory installed					
Ethernet	Interface	10/100/1000 Mbps					
	Controller	GbE LAN1: Intel 82578DM, LAN2: Intel 82583V					
	Connector	RJ-45 x 2					
SATA	Max Data Transfer Rate	300 MB/s					
	Channel	4					
Rear I/O	VGA	1					
	DVI	1					
	Ethernet	2					
	USB	4 (USB 2.0 compliant)					
	Audio	3 (Mic-in, Line-out, Line-in)					
	Serial	2 (RS-232)					
	PS/2	2 (1 x keyboard and 1 x mouse)					
	USB	4 (USB 2.0 compliant)					
Internal Connector	Serial	-					
	IDE	-					
	SATA	4					
	CompactFlash	-					
	Parallel	-					
	IrDA	-					
	GPIO	-					
Watchdog Timer	Output	System reset					
	Interval	Programmable 1 ~ 255 sec/min					
Power Requirements	Power On	5 V	3.3 V	12 V	5 Vsb	-12 V	
		1.85 A	0.73 A	3.14 A	0.31 A	0.11 A	
Environment		Operating			Non-Operating		
	Temperature	0 ~ 60° C (32 ~ 140° F), depends on CPU speed and cooler solution			-20 ~ 70° C (-4 ~ 158° F)		
Physical Characteristics	Dimensions	170 mm x 170 mm (6.69" x 6.69")					



Esis Pty Ltd
 Ph 02 9481 7420
 Fax 02 9481 7267
www.esis.com.au

Board Diagram

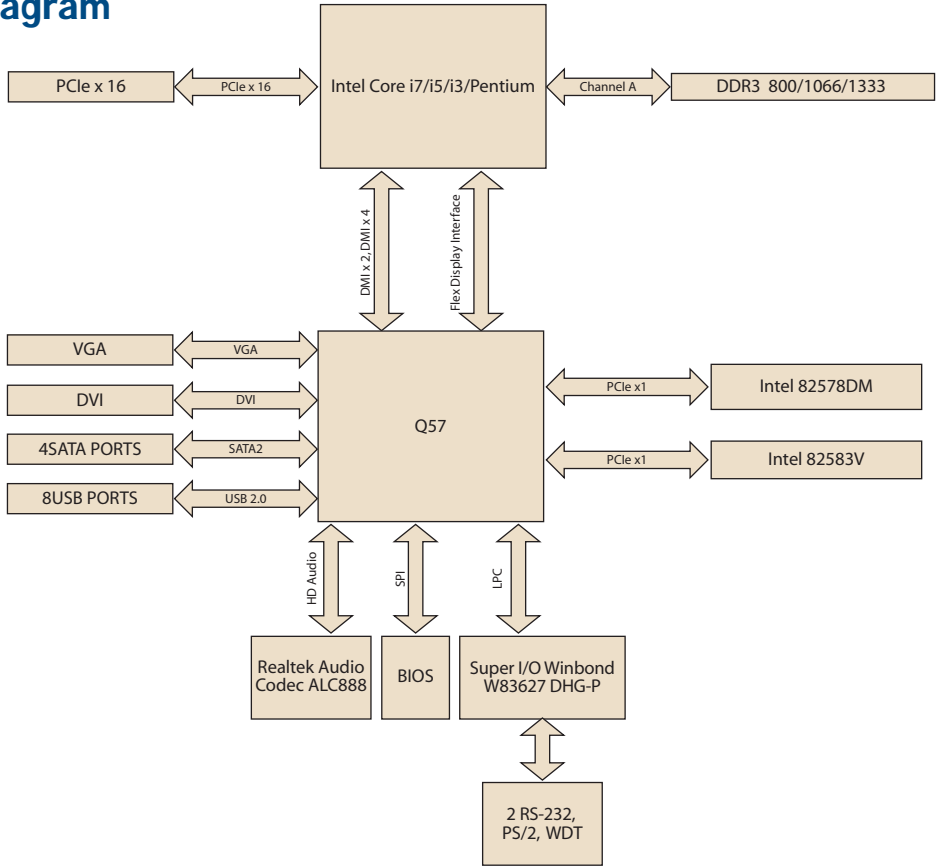

Ordering Information

Part Number	Chipset	VGA	DVI	SW RAID	USB	COM	GbE LAN
AIMB-280QG2-00A1E	Q57	Yes	Yes	Yes	8	2	2

Optional Accessories

Part Number	Description
1700002204	Dual port USB cable (27 cm) with bracket
1960047670N001	LGA1156 CPU cooler for 2U and wallmount chassis

Packing List

Part Number	Description	Quantity
1700003194	SATA HDD cable	2
1703150102	SATA Power cable	2
1960019193T100	I/O port bracket	1
2002028010	Startup manual	1
2062028000	Driver CD	1

Embedded OS/API

OS/API	Part No.	Description
Win XPE	2070009652	XPE WES2009 Q57 AIMB-280/580/780 V4.0 ENG
	2070009653	XPE WES2009 Q57 AIMB-280/580/780 V4.0 MUJ24
Software API	205E280000	SUSI 3.0 SW API for AIMB-280 XP

I/O View



AIMB-280G2-00A1E

ESIS Pty Ltd
 Ph 02 9481 7420
 Fax 02 9481 7267
www.esis.com.au

Value-Added Software Services

Software API: An interface that defines the ways by which an application program may request services from libraries and/or operating systems. Provides not only the underlying drivers required but also a rich set of user-friendly, intelligent and integrated interfaces, which speeds development, enhances security and offers add-on value for Advantech platforms. It plays the role of catalyst between developer and solution, and makes Advantech embedded platforms easier and simpler to adopt and operate with customer applications.

Software APIs

Control



GPIO

General Purpose Input/Output is a flexible parallel interface that allows a variety of custom connections. It allows users to monitor the level of signal input or set the output status to switch on/off a device. Our API also provides Programmable GPIO, which allows developers to dynamically set the GPIO input or output status.



SMBus

SMBus is the System Management Bus defined by Intel® Corporation in 1995. It is used in personal computers and servers for low-speed system management communications. The SMBus API allows a developer to interface a embedded system environment and transfer serial messages using the SMBus protocols, allowing multiple simultaneous device control.



I2C

I2C is a bi-directional two wire bus that was developed by Philips for use in their televisions in the 1980s. The I2C API allows a developer to interface with an embedded system environment and transfer serial messages using the I2C protocols, allowing multiple simultaneous device control.

Display



Brightness Control

The Brightness Control API allows a developer to interface with an embedded device to easily control brightness.



Backlight

The Backlight API allows a developer to control the backlight (screen) on/off in an embedded device.

Monitor



Watchdog

A watchdog timer (WDT) is a device that performs a specific operation after a certain period of time if something goes wrong and the system does not recover on its own. A watchdog timer can be programmed to perform a warm boot (restarting the system) after a certain number of seconds.



Hardware Monitor

The Hardware Monitor (HWM) API is a system health supervision API that inspects certain condition indexes, such as fan speed, temperature and voltage.



Hardware Control

The Hardware Control API allows developers to set the PWM (Pulse Width Modulation) value to adjust fan speed or other devices; it can also be used to adjust the LCD brightness.

Power Saving



CPU Speed


Make use of Intel SpeedStep technology to reduce power consumption. The system will automatically adjust the CPU Speed depending on system loading.



System Throttling

Refers to a series of methods for reducing power consumption in computers by lowering the clock frequency. These APIs allow the user to lower the clock from 87.5% to 12.5%.

Software Utilities



BIOS Flash

The BIOS Flash utility allows customers to update the flash ROM BIOS version, or use it to back up current BIOS by copying it from the flash chip to a file on customers' disk. The BIOS Flash utility also provides a command line version and API for fast implementation into customized applications.



Embedded Security ID

The embedded application is the most important property of a system integrator. It contains valuable intellectual property, design knowledge and innovation, but it is easily copied! The Embedded Security ID utility provides reliable security functions for customers to secure their application data within embedded BIOS.



Monitoring

The Monitoring utility allows the customer to monitor system health, including voltage, CPU and system temperature and fan speed. These items are important to a device; if critical errors happen and are not solved immediately, permanent damage may be caused.



eSOS

The eSOS is a small OS stored in BIOS ROM. It will boot up in case of a main OS crash. It will diagnose the hardware status, and then send an e-mail to a designated administrator. The eSOS also provides remote connection: Telnet server and FTP server, allowing the administrator to rescue the system.



Flash Lock

Flash Lock is a mechanism that binds the board and CF card (SQFlash) together. The user can "Lock" SQFlash via the Flash Lock function and "Unlock" it via BIOS while booting. A locked SQFlash cannot be read by any card reader or boot from other platforms without a BIOS with the "Unlock" feature.