

## SI-24



## Features

- Ultra slim (30mm) and compact chassis
- Onboard ATI Radeon™ E2400, up to 128MB GDDR3
- Onboard AMD Sempron™ 210U Processor, 1.5GHz
- Segregated-flow thermal solution - keeps electronics free of dust and contaminants for reliability
- Low noise, magnetic levitation bearing fans

## Specifications

System Mainboard	IB824
CPU Type	AMD Sempron™ 210U Processor
System Speed	1.5GHz
Memory	1x DDRII 400/667 SO-DIMM, Max. 2GB
Graphics	ATI Radeon™ E2400, up to 128MB GDDR3
LAN	1x Realtek RTL8111C PCI-e Gigabit LAN controller Optional MiniPCI-E for wireless module
Watchdog Timer	256 segments, 0, 1, 2...255 (sec/min)
Power Requirement	+12V@ 4.1A
Construction	Aluminum
Weight	1.9Kg (4.19lbs)
Chassis Color	Black & White
I/O Interface	2 x DVI-I ports , 4 x USB 2.0 ports, 1 x RJ45 connector, Power on/off button, Audio
Storage	1x 2.5" HDD drive bay
Mounting	Ultra slim (30mm) design with wall mounting holes
Dimensions	260mm (W)x 175mm(H) x 30mm(D)
Power Adaptor	Input Voltage: 90~264VAC, 47~63HZ, 2.0A Max. Output Power: 12VDC, 80W




## Environmental/Mechanical

Operating Temperature	0°C~ 45°C (32°F~113°F)
Storage Temperature	-20° ~ 80°C
Relative Humidity	5~95% @ 45°C, (non-condensing)
Vibration	CFD: 5 grms / 5~500Hz / random operation HDD: 0.25 grms / 5~500Hz / random operation
RoHS Compliance	Available

## Ordering Information

SI-24	Signage chassis for IB824 SBC, w/ AMD Sempron™ 210U 1.5GHz, 1GB RAM, 80GB HDD, 80W power adaptor
SI-24C	Signage chassis for IB824 SBC, w/ AMD Sempron™ 210U 1.5GHz, 80W power adaptor

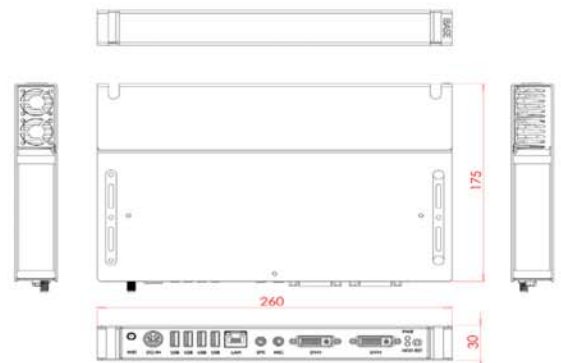

Remarks: 1. ODM/OEM is available  
2. Specifications are subject to change without prior notice.