

## Monitoring system

testo 160 IAQ – Monitoring system for temperature, humidity, atmospheric pressure and CO<sub>2</sub> concentration.

---

Measurement value transfer by wireless LAN to the Cloud store

---

Measurement values can be called up on all end devices

---

Alarm notification by SMS or e-mail

---

Inconspicuous design and small dimensions

---

Deco-cover for optimum individual adaptation of the logger to the surroundings

---



The WiFi data logger testo 160 IAQ monitors the ambient conditions temperature, humidity, atmospheric pressure and the CO<sub>2</sub> concentration in buildings such as public facilities, office complexes and education institutions. The logger transfers measurement values by wireless LAN to the online store (Testo Cloud). You can access all data at any time with the testo Saveris 2 App or by PC/tablet/smartphone and a normal browser. If limit values are exceeded, an alarm is immediately provided by SMS and/or e-mail.

Thanks to the optional, individually designable deco-cover, the logger can be integrated inconspicuously in buildings. The testo 160 IAQ thus enables you to check all relevant ambient conditions and fulfil the obligation of documentation.

# The testo 160 Cloud

## Our packages

The testo 160 Cloud is the central operating element of the testo 160 monitoring system. Here you can configure your WiFi data loggers, set limit value alarms and analyze measurement data. You must first register at [www.saveris2.net](http://www.saveris2.net) to have access to the testo 160 Cloud.

Depending on the range of functions you require, you have a choice between the free Basic and the more extensive Advanced functionality: In both packages, you have access to an API interface, in order to export measurement data to your systems.

	Basic	Advanced			
<b>Measuring cycle</b>	15 min. to 24 h	1 min. to 24 h			
<b>Communication cycle</b>	15 min. to 24 h	1 min. to 24 h			
<b>Data storage</b>	Max. 3 months	Max. 2 years			
<b>Reports</b>	Manual (.pdf/.csv)	Manual (.pdf/.csv) Automatic (.pdf/.csv)			
<b>Data analysis</b>	For one measurement site each (external probes count as measurement sites)	For up to 10 measurement channels simultaneously			
<b>Number of users per account</b>	1	10			
<b>Number of WiFi data loggers per account</b>	Unlimited	Unlimited			
<b>Alarm options</b>	Upper/lower alarm limits	<ul style="list-style-type: none"> <li>• Upper/lower alarm limits</li> <li>• Alarm delay</li> <li>• Time control of alarms</li> </ul>			
<b>System notifications</b>	<ul style="list-style-type: none"> <li>• Notification of low battery</li> <li>• Radio link interrupted</li> <li>• Power supply interrupted</li> </ul>	<ul style="list-style-type: none"> <li>• Notification of low battery</li> <li>• Radio link interrupted</li> <li>• Power supply interrupted</li> </ul>			
<b>E-mail alarm</b>	Yes	Yes			
<b>SMS alarm</b>	No	<ul style="list-style-type: none"> <li>• Including 25 SMS per logger and year</li> <li>• More SMS packages purchasable</li> </ul>			
		<table border="1"> <tr> <td>12-month licence order no. 0526 0735</td> <td>24-month licence order no. 0526 0732</td> <td>36-month licence order no. 0526 0733</td> </tr> </table>	12-month licence order no. 0526 0735	24-month licence order no. 0526 0732	36-month licence order no. 0526 0733
12-month licence order no. 0526 0735	24-month licence order no. 0526 0732	36-month licence order no. 0526 0733			

Register now: [www.saveris2.net](http://www.saveris2.net)

## Ordering data/technical data

### testo 160 IAQ

testo 160 IAQ WiFi air quality logger with display and integrated sensors for temperature, humidity, CO<sub>2</sub> and atmospheric pressure incl. mains unit



Order no. 0572 2014

## Accessories

	Order no.
Deco-cover for testo 160 IAQ	0554 2012
Wall bracket for testo 160 IAQ	0554 2015
Alkaline manganese mignoncell AA batteries up to -10 °C, order 4 off	0515 0414
External USB power supply	0572 2020
ISO calibration certificate temperature -8 °C, 0 °C, +40 °C	0520 0171
ISO calibration certificate humidity at +25 °C, humidity points 11.3 %RH and 75.3 %RH	0520 0076
ISO calibration certificate CO <sub>2</sub> , calibration points 0; 1000; 5000 ppm	0520 0033

Temperature measurement	
Measuring range	0 to +50 °C
Accuracy	± 0.5 °C
Resolution	0.1 °C
Humidity measurement	
Measuring range	0 to 100 %RH (non-condensing)
Accuracy	±2 %RH at +25 °C and 20 to 80 %RH ±3 %RH at +25 °C and < 20 %RH and > 80 %RH ±1 %RH hysteresis ±1 %RH / year drift
Resolution	0.1% RH
CO <sub>2</sub> measurement	
Measuring range	0 to 5,000 ppm
Accuracy	±(50 ppm + 3 % of m.v.) at +25 °C Without external power supply: ±(100 ppm + 3 % of m.v.) at +25 °C
Resolution	1 ppm
Pressure measurement	
Measuring range	600 to 1100 mbar
Accuracy	±3 mbar at +22 °C
Resolution	1 mbar
WLAN	
Standard	802.11 b/g/n
Security	WPA2 Enterprise: EAP-TLS, EAP-TTLS-TLS, EAP-TTLS-MSCHAPv2, EAP-TTLS-PSK, EAP-PEAP0-TLS, EAP-PEAP0-MSCHAPv2, EAP-PEAP0-PSK, EAP-PEAP1-TLS, EAP-PEAP1-MSCHAPv2, EAP-PEAP1-PSK, WPA Personal, WPA2 (AES), WPA (TKIP), WEP
General	
Operating temperature	0 to +50 °C
Storage temperature	0 to +50 °C
Protection class	IP20
Measuring cycle	Dependent on Cloud licence Basic: 15 min to 24 h Advanced: 1 min to 24 h / with battery operation: 5 mins to 24 h
Communication cycle	Dependent on Cloud licence Basic: 15 min to 24 h Advanced: 1 min to 24 h
Memory	32,000 readings (sum of all channels)
Voltage supply (alternatively mains unit via USB connection)	4 x AA alkaline manganese batteries 1.5 V
Battery life (depending on the measuring and communication cycle vis-a-vis the Cloud)	1 year
Dimensions	117 x 82 x 32 mm
Weight (including batteries)	269 g

# Data management

## The testo Saveris 2 App

With the testo Saveris 2 App for iOS and Android, you now operate the wireless LAN data logger system testo 160 even more easily and flexibly.

**More efficient commissioning\*:**

- Easy recognition and selection of the WiFi network
- Faster parallel commissioning of several loggers


**Easy network analysis\*:**

- Test the strength and range of your WiFi network
- Create and send status reports

**Reliable alarm functions\*:**

- Push notifications of limit value violations
- Combinable with e-mail or SMS alarms

\*These functions are available only in the Android version of the testo Saveris 2 App.

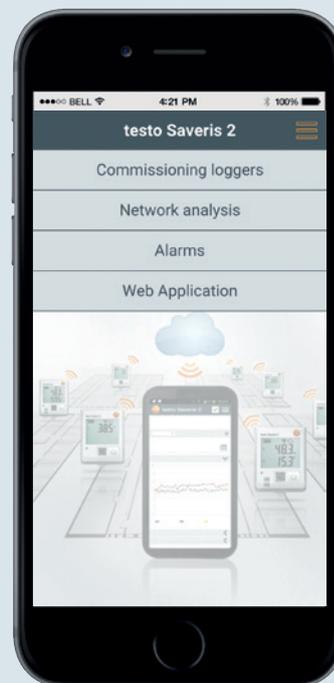

**testo Saveris 2 App**

for free download



1981 0284/msp/1/04.2018

Subject to change without notice.

	<a href="http://www.esis.com.au">www.esis.com.au</a>
	Ph 02 9481 7420
	Fax 02 9481 7267
	esis.enq@esis.com.au