

# Vaisala INTERCAP® Humidity and Temperature Probe HMP63



*The HMP63 with plastic enclosure for indoor environments*

## Features/Benefits

- Fast thermal response time
- Low power consumption
- Start-up time < 2 s
- Measurement range:  
0 ... 100 %RH; -40 ... +60°C
- Detachable cable with  
standard 4-pin M8 connector
- Plastic enclosure with IP54  
classification
- Interchangeable Vaisala  
INTERCAP® sensor
- Optional RS485 digital output
- Optional dew point output

The Vaisala INTERCAP® Humidity and Temperature Probe HMP63 is a cost-effective humidity probe with plastic enclosure. It is designed for non-condensing indoor environments or integration into other manufacturers' equipment.

## Easy Installation

The probe fits into tight spaces. The cable has a threaded M8 connector for easy installation. Different cable lengths are available and other compatible M8-series cables can also be used. Accessories are available for different installation needs.

## Low Power Consumption

The HMP63 is suitable for battery-powered applications thanks to its very low power consumption and fast start-up time.

## Several Outputs

There are two configurable voltage outputs for relative humidity, temperature, or dew point output. An alternative RS485 output is also available.

## Fast Thermal Response Time

The HMP63 has a PC/ABS plastic enclosure. It is ideal for conditions with fast temperature changes and when standard measurement accuracy is sufficient.

## No Recalibration Required

The HMP63 includes an interchangeable Vaisala INTERCAP® sensor. No recalibration is required – the humidity sensor can simply be replaced, even in the field.

# Technical Data

## Performance

RELATIVE HUMIDITY	
Measurement range	0 ... 100 %RH
Typical accuracy	
temperature range	0 ... +40 °C
0 ... 90 %RH	±3 %RH
90 ... 100 %RH	±5 %RH
temperature range	-40 ... 0 °C, +40 ... +60 °C
0 ... 90 %RH	±5 %RH
90 ... 100 %RH	±7 %RH
Humidity sensor	Vaisala INTERCAP®
TEMPERATURE	
Measurement range	-40 ... +60 °C
Accuracy over temperature range	
+10 ... +30 °C	±0.5 °C
-40 ... +10, +30 ... +60 °C	±0.6 °C
DEW POINT	
Measurement range	-40 ... +60 °C
Typical accuracy	
temperature range	0 ... +40 °C
when dew point depression < 15 °C	±2 °C
temperature range	-40 ... 0 °C, +40 ... +60 °C
when dew point depression < 10 °C	±3 °C
dew point depression = ambient temperature - dew point	

## Inputs and Outputs

Operating voltage	5 ... 28 VDC / 8 ... 28 VDC with
(Use lowest available operating	5 V output
voltage to minimize heating.)	8 ... 28VDC with loop power
	converter
Current consumption	1 mA average, max. peak 5 mA
Start-up time	
probes with analog output	4 s at operating voltage
	13.5 ... 16.5 VDC
	2 s at other valid operating voltages
probes with digital output	1 s
Outputs	
2 channels	0 ... 1 VDC/0 ... 2.5 VDC/0 ... 5 VDC/1 ... 5 VDC
1-channel loop-power converter (separate	
module, compatible with humidity accuracy only)	4 ... 20 mA
digital output (optional)	RS485 2-wire half duplex
External loads	
0 ... 1 V	R <sub>L</sub> min 10 kΩ
0 ... 2.5 V / 0 ... 5 V	R <sub>L</sub> min 50 kΩ

## Operating Environment

Operating temperature	-40 ... +60 °C
Electromagnetic compatibility	EN 61326-1: Electrical equipment for measurement, control and laboratory use – EMC requirements – Basic immunity test requirements.

## Mechanics


Materials	
body	PC/ABS blend
grid filter	PC (glass reinforced)
cable	polyurethane or FEP
Housing classification	IP54
Cable connector	4-pin M8 (IEC 60947-5-2)
Weight	
probe	9 g
probe with 0.3 m cable	20 g

## Options and Accessories

Vaisala INTERCAP® Sensor, 1 piece	15778HM
Vaisala INTERCAP® Sensor, 10 pcs	INTERCAPSET-10PCS
Sensor protection	
plastic grid for use with HM40	DRW236214SP
membrane filter	230727SP
stainless steel sintered filter	HM47280SP
porous PTFE filter	219452SP
4 ... 20mA loop power converter	UI-CONVERTER-1CB
Mounting bracket for converter	225979
USB cable for PC connection	219690
Probe mounting clamp set, 10 pcs	226067
Probe mounting flange	226061
Connection cables	
0.3 m PU	HMP50Z032SP
3 m PU	HMP50Z300SP
180 °C 3 m FEP	226902SP

## Dimensions

in mm (inches)

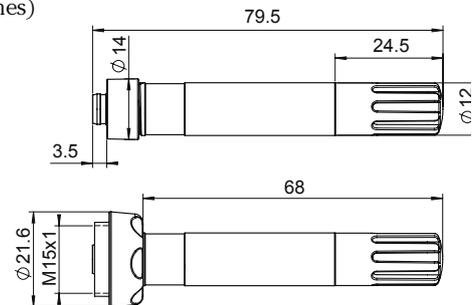

# VAISALA

www.vaisala.com



**www.esis.com.au**  
 Ph 02 9481 7420  
 Fax 02 9481 7267  
 esis.enq@esis.com.au

**Industrial Electronics**

Ref. B211250EN-B ©Vaisala 2013

This material is subject to copyright protection, with all copyrights retained by Vaisala and its individual partners. All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of Vaisala is strictly prohibited. All specifications – technical included – are subject to change without notice.