

Getac

Rugged Mobile Computing Solutions



RX10 Fully Rugged Tablet


- Intel® Core™ M vPro™ Processor Technology
- 10.1" Full HD LumiBond®2.0 display with Getac sunlight readable technology
- Getac proprietary SnapBack accessories with keyboard & SmartCard options
- 1D/2D imager barcode reader option
- LifeSupport™ hot-swap battery technology for uninterrupted power



SnapBack Add-on



Office Dock

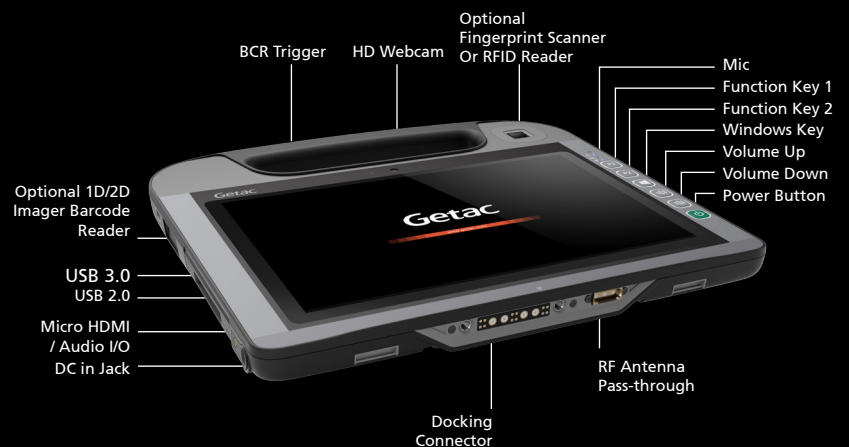

RX10 Fully Rugged 10.1" Tablet

Getac recommends Windows.



Specifications

Operating System	Windows 10 Professional Windows 7 Professional
Mobile Computing Platform	Intel® Core™ M Processor Technology Intel® Core™ M 1.2GHz Processor (up to 2.90 GHz with Intel® Turbo Boost Technology) - 4M Intel® Smart Cache Intel® Core™ M 800MHz Processor (up to 2 GHz with Intel® Turbo Boost Technology) - 4M Intel® Smart Cache
Graphics	Intel® HD Graphics 5300
Display	10.1" IPS TFT LCD Full HD LumiBond®2.0 display with Getac sunlight readable technology capacitive multi-touch screen (1920 x 1200, 800nits)
Memory & Storage	4GB LPDDR3 (expandable to 8GB) SSD 64GB / 128GB
Keyboard	6 tablet buttons (Windows, Power, Function Key 1, Function Key 2, Barcode Reader Trigger, Volume Up, Volume Down)
Pointing Device	Touchscreen - Capacitive multi-touch screen - Optional dual mode touchscreen (multi-touch and digitizer)
Expansion Slot	Optional 1D/2D imager barcode reader
I/O Interface	HD webcam x 1 8M pixels auto focus rear camera x 1 Headphone out/mic-in combo x 1 DC in Jack x 1 USB 3.0 (9-pin) x 1 USB 2.0 (4-pin) x 1 Docking connector (16-pin) x 1 Micro HDMI x 1 Optional RF antenna pass-through for GPS, WLAN and WWAN
Communication Interface	Intel® Dual Band Wireless-AC 7265, 802.11ac Bluetooth (v4.0) ⁱ Optional dedicated GPS Optional Gobi™ mobile broadband

Software	Getac Utility Getac Camera Adobe® Reader® Getac Barcode Manager Optional CompuTrace® Persistence module
Security Feature	TPM 2.0 Optional Intel® vPro™ Technology Optional fingerprint scanner or RFID reader ^{ii,iii} Optional SnapBack add-on : Hand Strap & Kick Stand & Smart Card Reader Optional SnapBack add-on : Hand Strap & Kick Stand & Smart Card Reader & Detachable Keyboard
Power	AC adapter (65W, 100-240VAC, 50 / 60Hz) Li-Ion battery (15.2V, 2160mAh) ^{iv} LifeSupport™ hot-swap battery technology Optional High Capacity Battery with Smart Card reader Expansion
Dimension (W x D x H) & Weight	280x 245 x 18.8mm 1.2 ~ 1.3kg ^v
Rugged Feature	MIL-STD-810G certified and IP65 certified MIL-STD-461F certified ^{vi} 4 feet drop resistant Vibration & drop resistant e-Mark certified for vehicle usage Optional ANSI/ISA 12.12.01 Optional EN/IEC 60601-1
Environmental Specification	Temperature ^{vii} : -Operating: -21°C to 55°C -Storage: -50°C to 71°C Humidity: -95% RH, non-condensing
Optional Accessories	Carry bag Main battery (15.2V, 2160mAh) AC adapter (65W, 100-240VAC) Vehicle adapter (90W, 11-16V DC and 22-32V DC) Capacitive stylus Digitizer Shoulder strap (2-point) Hand-strap & Kick Stand Hand-Strap & Kick Stand & Smart Card Reader Hand-Strap & Kick Stand & Smart Card Reader & Detachable Keyboard Vehicle dock Office dock Protection Film Multi-Bay Charger (Two Bay) Multi-Bay Charger (Eight Bay)

Docking Solutions

	Serial Port	External VGA	DC in Jack	USB	LAN	HDMI	RF Antenna Connector
Vehicle Dock	1	-	1	2	1	-	3 (Optional)
Office Dock	-	1	1	4	1	1	-

i Bluetooth performance and connectable distance may be subject to interference from the environment and other client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that are operating in the area.
ii RFID and Fingerprint scanner are mutually exclusive options.
iii 13.56MHz Contactless RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FelICa™ compliant).
iv Battery life testing conducted under MobileMark 2007. Battery performance will vary dependant upon software applications, wireless settings, power management settings, LCD brightness, customized

modules and environmental conditions. The battery has a limited number of charge cycles and may eventually need to be replaced by a Getac service provider. Battery life and charge cycles vary by use and settings.
v Weight varies from configurations and optional accessories.
vi MIL-STD-461F 90W AC adapter sold separately
vii Tested by an international independent third party test lab following MIL-STD-810G.

Getac



Getac UK Limited
Mitac House, Nedge Hill, Telford,
Shropshire, TF3 3AH, U.K.
Tel: +44 1952 207 200
Email: sales-getac-UK@getac.com
www.getac.co.uk

Copyright© 2016 Getac Technology Corporation and/or any of its affiliates. All rights reserved. All specifications are subject to change without notice. V03M08Y16UK

