


## CMB-378

- Barebone system support 2<sup>nd</sup> generation Intel® Core™ i7/i5/i3
- DDR3 up to 8.0GB,VGA,DVI,4xUSB,COM,Audio
- 1 x Intel® Giga LAN , DC 9V~24V input



<b>Form Factor</b>	Mini bare-bone system
<b>Construction</b>	Heavy-Duty steel
<b>Processor</b>	Support 2 <sup>nd</sup> Intel® Core™ i7 / i5 / i3 in PGA 988B.
<b>Chipset</b>	Mobile Intel® QM67 Express Chipset
<b>Memory</b>	Support DDR3 1066/1333 204-pin / SO-DIMM up to 8.0 GB
<b>Drive Bay</b>	1 x internal 2.5" HDD space . Shock-resistant .
<b>Extensive slot</b>	2 x Mini-PCIe sockets
<b>Thermal Control</b>	One 5 cm system cooling Fan
<b>Front Panel</b>	Power on switch , LED for Power On/Off and HDD activity 2 x USB ports , Mic-in / Ear phone
<b>Rear Side I/O</b>	PS/2 Keyboard/Mouse x 1 , RJ45 LAN x 1 , USB 2.0 x 2 RS232 , VGA x 1 , DVI x 1 , wifi antenna hole x 1 1 x PCI bracket space for Mini-PCIe daughter board
<b>Power supply</b>	DC 9V ~ 24V input (Min. 100W power supply required)
<b>Environment</b>	Operating Temperature: 0 ~ 40°C . Humidity: 10 ~ 85% @ 40°C (non-condensing)
<b>Dimension</b>	190 x 150 x 75 mm ( L x W x H )

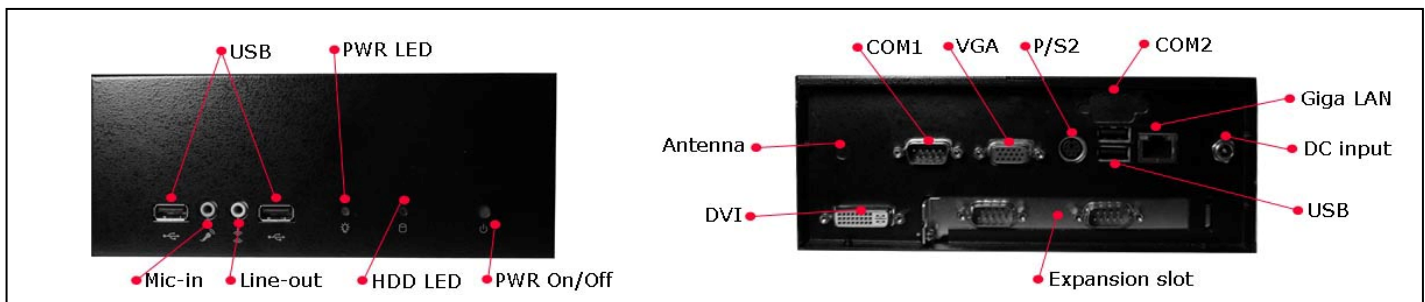

## Ordering Code

<b>CMB-377</b>	Barebone system with LS-378DXT board & CPU cooling Fan
<b>Processor</b>	Intel® Core™ i7-2710QE / i5-2510E / i3-2330E mobile processor
<b>Memory</b>	DDR3 1066/1333 for 1.0 GB / 2.0 GB / 4.0 GB
<b>HDD</b>	2.5" SATA HDD for 160GB / 320 GB / 500 GB

