

# ACP-1010

## 1U Rackmount Chassis for Full-size SHB/SBC or ATX/MicroATX Motherboard



### Features

- Supports full-size SHB/SBC or ATX/MicroATX motherboards
- LED indicators for power, HDD, temperature, fan, LAN1 and LAN2
- Supports up to 2 expansion slots in BP version, and 1 expansion slot via riser card in MB version
- Supports both 250W/350W Flex ATX/PFC power supplies

CE FCC


### Specifications

		External	Internal
Driver bay	Slim Optical Disk Drive	1	-
	3.5"	1	1*
	2.5"	-	2*
Cooling	Fan	BP: 4 (4 cm/24 CFM x 3 + 15 CFM x 1) MB: 2 (4 cm/24 CFM each)	
Front I/O Interface	USB 2.0	2	
Miscellaneous	Notification LEDs	System: Power, HDD, Temperature, Fan, LAN1 and LAN2	
	Control	Power switch, system reset & alarm reset button	
	Rear panel	One 9-pin D-Sub opening	
Environment	Temperature	Operating 0 ~ 40 °C (32 ~ 104 °F)	Non-Operating -20 ~ 60 °C (-4 ~ 140 °F)
	Humidity	10 ~ 85% @ 40 °C, non-condensing	10 ~ 95% @ 40 °C, non-condensing
	Vibration (5 ~ 500 Hz)	0.5 Grms	2 Grms
	Shock	10 G (with 11 ms duration, half sine wave)	
	Physical Characteristics	Dimensions (W x H x D)	480 x 44 x 497 mm (19" x 1.7" x 19.6")
	Weight	8 kg (17.6 lb)	

\* Internal driver bay can choose 1 x 3.5" or 2 x 2.5"

\* ACP-1010 support up to CPU 65W under 35 °C for thermal concern.

### Front View

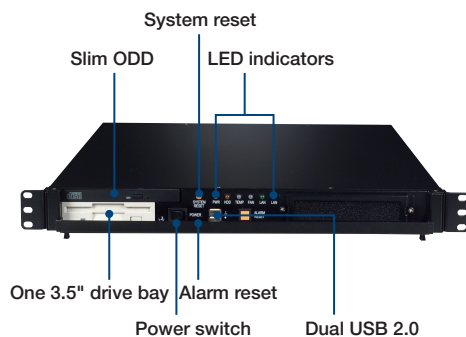

### Back View



ACP-1010BP



ACP-1010MB

