

# ACP-2000/ IPC-602

## 2U 6-Slot Rackmount Chassis with Front USB and PS/2 Interfaces



### Features

- 2U rackmount chassis supports up to 6 cards
- Butterfly backplane design
- Front-accessible USB and PS/2 connectors
- 250W / 300W AC ATX and DC power supply options
- Two 40 CFM cooling fans with air filter
- Lockable front door prevents unauthorized access

### Features with ACP-2000 only:

- System alarm notification by front LED indicators
- Built-in Intelligent System Module enabling whole system fan control and remote manageability

CE FCC

### Specifications


		External	Internal
Drive Bay	Slim Optical Disk Drive	1/-	-
	3.5"	2/1	-/1
	5.25"	-/1	-
Cooling	Fan	2 (8 cm / 47 CFM each) / 2 (8 cm / 40 CFM each)	
	Air Filter	Yes	
Front I/O Interface	USB	2	
	PS/2	1	
Miscellaneous	LED Indicators	Power and HDD activity; fan and temperature for ACP-2000 only	
	Rear Panel	One 9-pin D-Sub opening	
Intelligent System Module Remote Monitoring	CPU/System fan speed , CPU/System temperature , motherboard voltage (Only selected Advantech MBs/CPU cards with WISE-PaaS/RMM installed can fully enable these functions, check with Advantech local rep. for detailed information.) (This feature only enabled in ACP-2000)		
Environment	Temperature	Operating 0 ~ 40 °C (32 ~ 104 °F)	Non-Operating -20 ~ 60 °C (-4 ~ 140 °F)
	Humidity	10 ~ 85% @ 40 °C, non-condensing	
	Vibration (5 ~ 500 Hz)	0.5 Grms	2 G
	Shock	10 G (with 11 ms duration, half sine wave)	
Physical Characteristics	Dimensions (W x H x D)	482 x 88 x 451 mm (19" x 3.5" x 17.8")	
	Weight	11.5 kg (25.3 lb) / 11.3 kg (24.9 lb)	

### Front View

#### IPC-602



#### ACP-2000

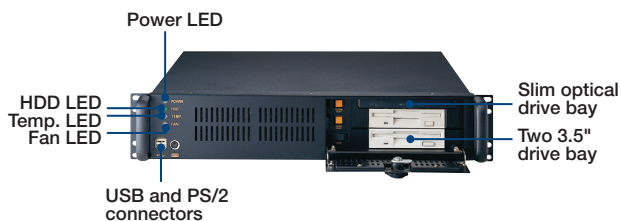

### Inside View

