

# ACP-4320

## Quiet 4U Rackmount Chassis with Dual Hot-Swap SATA HDD Trays



### Features

- Supports either an ATX motherboard or a PICMG backplane with up to 15 slots
- Supports dual SATA hot-swap HDD trays
- LED indicators and alarm notification for system fault detection
- Low noise system fans
- Built-in Intelligent System Module enabling whole system fan control and remote manageability


Quiet

CE FCC

### Specifications

		External	Internal
Driver Bay	5.25"	2	-
	3.5"	1 SATA Tray	-
	Hot Swap	2 (compatible with 3.5" or 2.5" devices)	-
Cooling	Fan	1(12 cm/74 CFM) + 1 (6cm / 28 CFM)	
	Air Filter	Yes	
	Smart Fan	System fan speed referring to chassis thermal sensor, or CPU temperature (Available with selected Advantech MBs/CPU cards)	
Front I/O Interface	USB 2.0	2	
Miscellaneous	LED Indicators	Power, HDD, temperature, fan, LAN1 and LAN2	
	Rear Panel	Backplane version: One 9-pin D-Sub opening Motherboard version: Five 9-pin D-Sub opening and one 25-pin D-sub opening	
Intelligent System Module Remote Monitoring	CPU/System fan speed, CPU/system temperature, motherboard voltage (Only selected Advantech MBs/CPU cards with WISE-PaaS/RMM installed can fully enable these functions, check with Advantech local rep. for detailed information.)		
Environment	Temperature	Operating 0 ~ 40 °C (32 ~ 104 °F)	Non-Operating - 20 ~ 60 °C (-4 ~ 140 °F)
	Humidity	10 ~ 85% @ 40 °C , non-condensing	
	Vibration (5 ~ 500 Hz)	1 Grms	2 G
	Shock	10G ( with 11 ms duration, half sine wave )	
Physical Characteristics	Dimension (W x H X D)	482 x 177 x 479 mm (19" x 7.0" x 18.9")	
	Weight	17.6 kg (38.7lb)	

### Front View

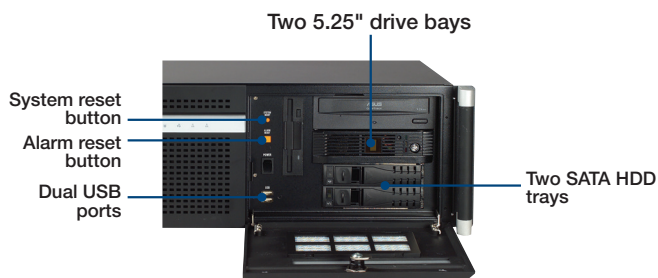

### Inside View

Easy-to-maintain system fan



