

# TBOX-12620

*Industrial Intel Skylake Core I5 fan-less Box PC*

## Specification

V2.0

### Brief Introduction

CYBERVISUELL TBOX-12620 is a high-performance ultra-compact fan-less industrial Box PC model, it adapts Intel Skylake Core I5-6200U CPUs, having advanced computer performance and low power consumption. TBOX-12620 storage can support 1 \*mSATA SSD or HDD; The design has a limited communication interface, with 2\* LAN ports, 4\* USB 3.0 port; The power input is DC 12~19V voltage, and has over-current, over-voltage and reverse-polarity protection.

CYBERVISUELL TBOX-12620 uses full-sealed box construction, and it can prevent dust from entering the device system. Large aluminum fin heat sink can distribute the heat effectively and quickly, ensures the longer reliability and life-span of the system. CYBERVISUELL TBOX-12620 operating temp. is -20°C~+60°C, can be suitable for longer-time operating and harsh environment industrial application projects, such as intelligent transportation system, machine vision, medical device, textile machinery, rail transportation and industry automation. CYBERVISUELL TBOX-12620 can be compatible with Windows 7, Windows 7 Embedded, Windows8, Windows10, Linux Operating system and embedded Operating system, and it is also compatible with application software based on those operating systems.

### Product Image




## Specification parameter

|                                  |  |
|----------------------------------|--|
| <b>Product model</b>             | <b>TBOX-11620</b>  |
| <b>System &amp; Hardware</b>     |  |
| BIOS                             | SPI AMI EFI BIOS   |
| CPU                              | Intel Core I5-6200U  |
| CPU GHz                          | Dual-core 2.3Ghz   |
| Memory                           | SO-DIMM, DDR4L, Max. up to 16GB  |
| Storage                          | 1* mSATA   |
| GPU                              | Intel HD Graphics 520  |
| Network                          | 2* Intel I211AT (Optional Wifi/3G/4G)                                  |
| Audio                            | Realtek ACL 269 Audio controller                                       |
| Expansion                        | 1x full-size mPCIe slot  |
| Watch dog                        | 0~255 seconds programmable   |
| System                           | Windows 7, Windows 7 Embedded, Windows8, Windows10, Linux              |
| <b>I/O</b>                       |  |
| COM                              | No COM   |
| Network                          | 2*RJ45, 10/100/1000 Mbps   |
| Audio                            | Line-In, Line-Out  |
| USB                              | 4*USB3.0   |
| Display                          | 1*HDMI   |
| Power Input                      | 1*2 pins, phoenix port   |
| <b>Structure</b>                 |  |
| Box Structure and surface        | Aluminum alloy, anodizing and anti-scratch treatment                   |
| Cooling System                   | Finned aluminum heatsinks  |
| Color                            | Black  |
| Indicator                        | Power Switch/ Power LED/ HDD LED                                       |
| Mounting                         | Support Desktop, Wall-mounted,   |
| Dimension                        | 168.4 x 106.2 x 45 (mm)  |
| Net weight                       | About 1.3KG  |
| <b>Power &amp; Environmental</b> |  |
| Voltage Input                    | DC 12~19V (Over-current, Over-voltage and reverse polarity protection) |
| Power Consumption                | 25W  |
| EMC                              | CE/FCC Class A   |

**TBOX-11620 Specs**

|                     |                                   |
|---------------------|-----------------------------------|
| Working temperature | -20°C~+60 °C                      |
| Storage temperature | -30°C~+70 °C                      |
| Relative humidity   | 10~95%@10°C (No condensation)     |
| Vibration           | 50~500Hz,1.5G,0.15mm peak to peak |
| Shock               | 10G/peak (11ms sec)               |

**Interface and Dimension**

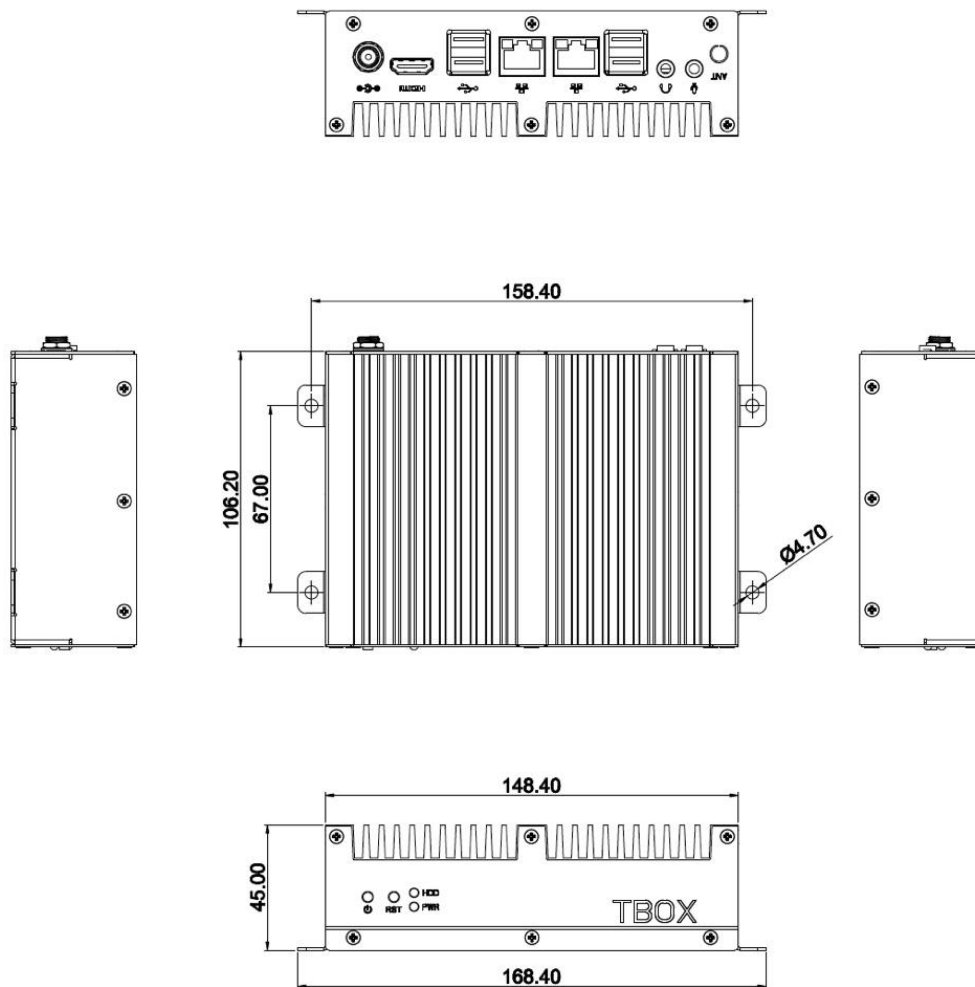

## Ordering Information

|                 |  |
|-----------------|--|
| TBOX-12610      | Intel Core I3-6100U/1*HDMI/2*RJ45/4*USB/DC 12~19V/Line In/Line-Out |
| TBOX-12620      | Intel Core I5-6200U/1*HDMI/2*RJ45/4*USB/DC 12~19V/Line In/Line-Out |
| TBOX-12630      | Intel Core I7-6500U/1*HDMI/2*RJ45/4*USB/DC 12~19V/Line In/Line-Out |
| Memory          | DDR3L 4G/8G/16G  |
| Storage         | SSD: 16GB/32GB/64GB/128GB/256GB/512GB/1TB<br>HDD: 500GB/1TB        |
| Wireless module | Wifi: 802.11b/g/n Mini PCIe 150M<br>3G/4G: All network 4G module   |



## CyberVisuell Industrielle Technologie

*CyberVisuell, is a leading global **solution provider** of industrial technology including Embedded Box PC, Touch panel PC, industrial monitors, power instrumentation, and M2M comms equipment. CyberVisuell products are designed specifically for systems and applications that require excellent performance, high-level reliability and stability, and long product lifecycles.*

*The information in this specification is subject to change without notice  
All parts of CyberVisuell Industrielle Technologie documentation are protected by copyright law and all rights are reserved. This documentation may not, in whole or in part, be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form without prior consent, in writing, from CyberVisuell Industrielle Technologie.*