



HAXO-8 Temperature & Humidity Recorder

- Record high resolution Temperature & Humidity readings simultaneously.
- A real time clock provides date/time stamps for each temperature reading.
- Push-to-start button with optional delay or a specific time & date.
- Comprehensive customisation options including alert settings, sample interval and trip duration.
- Robust and durable polycarbonate case with lug for secure mounting.
- Up to 8,000 recordings - enough for the longest trip.
- In-transit inspections can be recorded at the push of a button.
- Replaceable air filter.

The LogTag® HAXO-8 Humidity & Temperature Recorder measures and stores up to 8000 sets of high resolution humidity and temperature readings over a measurement range of 0 to 100%RH & -40°C to +85°C (-40°F to +185°F).


Enclosed in a robust and durable polycarbonate case - the HAXO-8 is equipped with a unique external temperature sensor arrangement providing fast reaction time to temperature change and a real time clock which provides date/time stamps for each temperature reading.

Using the LogTag Interface and LogTag's freely available companion software LogTag Analyzer, the LogTag is easily set-up for recording conditions including delayed start, sampling interval, number of readings, continuous or fixed number of readings and configuration of conditions to activate the ALERT indicator.

Readings are downloaded using LogTag Analyzer which provides facilities for charting, zooming, listing data statistics and allows exporting the data to other applications such as Excel.

The LogTag® HAXO-8 complies with the relevant international standards for temperature monitoring devices:- FCC, CE, C-TICK and RoHS. This demonstrates the quality and suitability of the LogTag® HAXO-8 for temperature monitoring applications where accuracy and consistency is required.

Additional RH uncertainty for temperatures different than 25°C

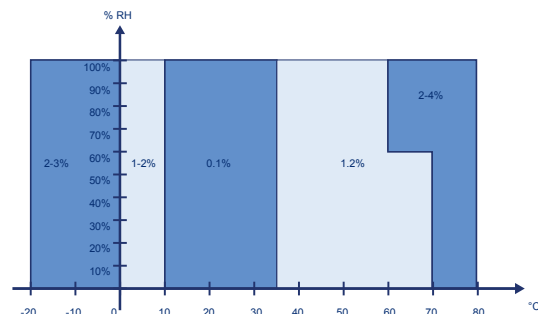

This graph shows the possible additional uncertainty in %RH compared to the accuracy specifications for temperatures different than 25°C for the standard factory calibration. The shown uncertainties may be positive or negative.

The performance can be improved by re-calibrating the product for %RH at the specific temperature of interest after which case this chart would no longer apply.

Humidity Measurement Operating and Storage Conditions

This chart shows the normal recommended operating range of the humidity sensor. Conditions outside the recommended range may temporarily offset the RH signal up to ± 3 %RH.

After return to normal conditions it will slowly return towards calibration state by itself. See "Reconditioning Procedure" to accelerate this process. Prolonged exposure to extreme conditions may accelerate ageing.

