


Specifications

System		
Processor	CPU	Intel® 7 th Core™ i3/i5/i7 Desktop LGA1151 CPU, TDP=35W (fan-less)
	Chipset	Intel® Q170 Chipset
	BIOS	AMI SPI 64Mb, support ACPI, CPU temperature, system voltage monitoring
Memory	Interface	2 x DDR4 SO-DIMM, @1.2V, 1866/2133/2400/2666 MHz
	Capacity	Max. single RAM up to 16G, Dual channels, Expansion up to 32GB
Storage	Interface	1 x 2.5" HDD, support 5~9.5mm, hot pluggable
		1 x 2.5" HDD, support 5~9.5mm, Internal
		1 x M.2 SATA 3.0 (22*42mm), Internal
Display	Chipset	CPU integrated Intel® HD Graphics, support DirectX12
	Ports	1 x DP (Max. support resolution: 4096x2304 x24bpp, @ 60Hz)
		1 x DVI-D (Max. support resolution: 1920x1200, @ 30Hz) 1 x VGA (Max. support resolution: 2048x1536)
Network	Chip	2 x Intel® Ethernet Connection; LAN1: I210-AT, LAN2: I219-LM, support WOL
	Wireless	1 x Mini-PCIE (Half/ full, support 802.11b/g/n, 3G/4G, optional)
		1 x SIM slot
Audio	Chips	Realtek ALC662 5.1 Channel HAD Code
	Port	1 x Mic-in + 1 x Audio-out
I/O	USB	6 x USB 3.0
	COM	4 x DB9 RS232 (COM1/COM2 support RS485/RS422/RS232, BIOS controllable)
Expansion I/O	Front signal	1x 6 pin front panel controlled signal (Power on, restart, status LED, optional)
	Watchdog	1 x Internal USB 2.0 (Optional)
	COM	2 x 9pin COM pin-header (RS232)
	GPIO	8 x GPIO (4 IN 4 OUT, DI low level, DO high level, DI/DO BIOS configurable, Optional)
		8 x GPIO (4 IN 4 OUT, photoelectric isolated, 5V~40V wide voltage input, OMRON relay output, DB25, optional)
MXM	1 x MXM 3.0 (support 4x GigE)	
Power	Type	DC
	Port	1 x 4pin 5.08 phoenix terminal, with hole lock
	Input	18~36V, Max. power support 240W
LED/Switch	Power on	1 x power on button (including status LED light)
	Reset	1 x reset/restart button (Long press ≥3s when power of, clear CMOS; press 0.2~1s reset when power on)
Watchdog		Programmable 255 seconds
OS	version	Windows 7/8.1/10 64 bits, Linux
RAID	Mode	0, 1
Structure		
Treatment	Hard anodizing treatment, scratch resistant	
Color	Iron grey, industrial grey color	

Cooling	Fan-less design
Weight	4.12kg
Dimension	268mm(L) x 194.2mm(W) x 67.7mm(H)
Mounting	Desktop, wall mount, VESA mount (100 x 100mm)
Environmental	
Operation temp.	Operating temp.: -20~60°C (Industrial SSD) Operating temp.: 0~40°C (HDD)
Storage	-40~80°C
Humidity	10%~90%@40°C (non-condensation)
Vibration	SSD: 3Grms@5~500Hz, random, 1 hr/axis; 2.5" HDD: 1Grms@5~500Hz, random, 1 hr/axis
Shock	10G/peak (11ms sec)

Interface and Dimension

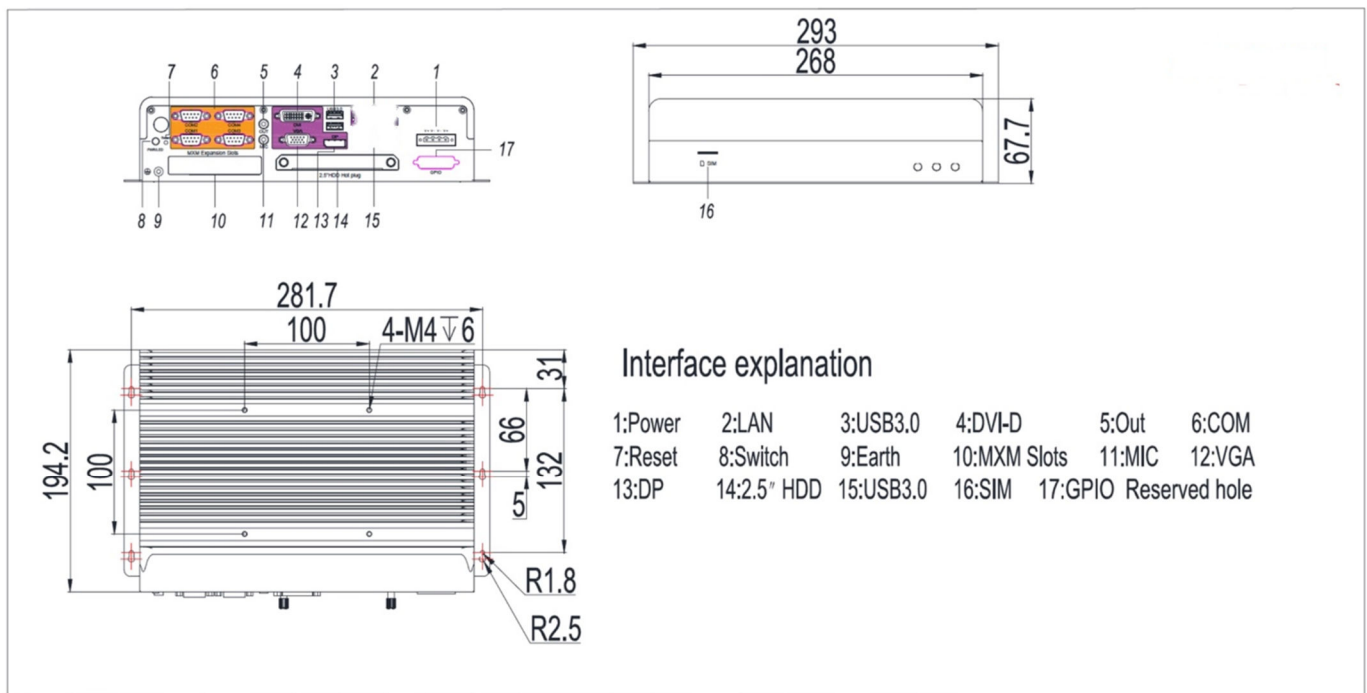

Ordering Information

CYBOX-AE7L-71	Intel Kabylake i3-7100T/1*DVI-D/1*DP/1*VGA/2*RJ45/6*USB/4*RS232/DC/Mic In/Line-Out
CYBOX-AE7L-72	Intel Kabylake i5-7500T/1*DVI-D/1*DP/1*VGA/2*RJ45/6*USB/4*RS232/DC/Mic In/Line-Out
CYBOX-AE7L-73	Intel Kabylake i7-7700T/1*DVI-D/1*DP/1*VGA/2*RJ45/6*USB/4*RS232/DC/Mic In/Line-Out
Memory	DDR4L 4G/8G/16G/32GB
Storage	SSD: 32GB/64GB/128GB/256GB/512GB/1TB HDD: 500GB/1TB
Wireless module	Wifi: 802.11b/g/n Mini PCIe 150M 3G/4G: Telit Asia Pacific 4G module

CyberVisuell Industrielle Technologie

*CyberVisuell, is a leading global **solution provider** of industrial technology including Embedded Box PC, Touch panel PC, industrial monitors, power instrumentation, and M2M comms equipment. CyberVisuell products are designed specifically for systems and applications that require excellent performance, high-level reliability and stability, and long product lifecycles.*

The information in this specification is subject to change without notice

All parts of CyberVisuell Industrielle Technologie documentation are protected by copyright law and all rights are reserved. This documentation may not, in whole or in part, be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form without prior consent, in writing, from CyberVisuell Industrielle Technologie.