

PTB330TS

Price

VAISALA


Order form Purchaser Valid from February 2013 Order no.

PTB330TS Barometric Pressure Transfer Standard


Vaisala BAROCAP® Barometric Pressure Transfer Standard

Please, select below a configuration code for the PTB330 Barometer on the first row, for the MI70 Indicator on the second row and optionally for the HMP155 Probe on the third row.

PTB330 Digital Barometer for PTB330TS

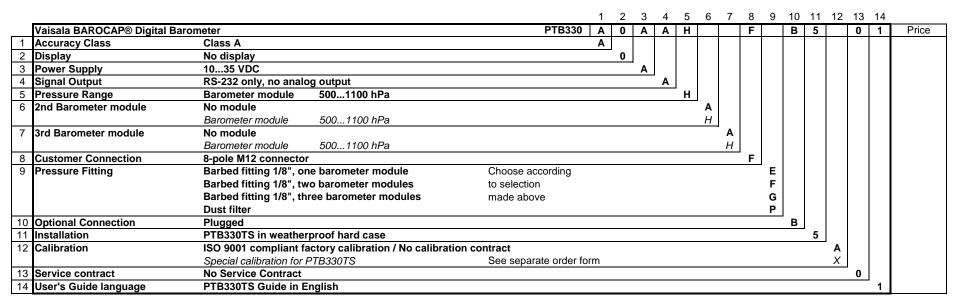

Selections in bold are included in the price of the basic version Selections in italic are available at an extra cost



MI70 Hand-Held Indicator for PTB330TS

| | | | 1 | 2 | 3 | - |
|----------------------------|--|--|---------|------|---|-------|
| Vaisala Hand-held Ind | licator | | MI70 | 4 | | Price |
| 1 Charger type | Euro AC-adapter | | В | | | |
| | UK AC-adapter | | С | | | |
| | US AC-adapter | | D | | | |
| | AUS AC-adapter | | E | | | |
| | All AC-adapters | | F | | | |
| 2 Installation | PTB330TS | | | 4 | | |
| 3 Accessories | none | | | | 0 | |
| | MI70LINK software with RS232 cable | | | | 1 | |
| | MI70LINK software with USB cable | | | | 4 | |
| | | | | | | - |
| | e included in the price of the basic version | Example of order code with typical settings: | MI70 B | 4 | 4 | |
| Selections in italic are a | available at an extra cost | | | | | |
| | | | | | | |
| | | | Total v | alue | | |

Spare parts:

MI70 connection cable to HMT330, MMT330, DMT340, HMT100, PTB330 MI70 battery

Item: 211339 Item: 26755

OPTIONAL (with additional price):

HMP155 Humidity and Temperature Probe for PTB330TS

| | | | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | |
|----|---|---|--------------|---|---|---|---|---|---|---|---|---|----|----|----|--------|------|----|-------|
| | Vaisala HUMICAP [®] Humidity and | Temperature Probe | HMP155 | Ε | 1 | Α | Α | | | Α | | | 0 | | 1 | С | 4 | Α | Price |
| 1 | Probe type | RS485 serial output | | Е | | | | | | | | | | | | | | | |
| 2 | Signal output selection | RS485 serial output | | | 1 | | | | | | | | | | | | | | |
| 3 | Analog output signal for CH1 | None | | | | Α | | | | | | | | | | | | | |
| 4 | Analog output signal for CH2 | None | | | | | Α | | | | | | | | | | | | |
| 5 | Units | Metric | | | | | | 1 | | | | | | | | | | | |
| | | Non-metric | | | | | | 2 | | | | | | | | | | | |
| 6 | Humidity sensor type | General purpose | HUMICAP180R | | | | | | 1 | | | | | | | | | | |
| | | Composite sensor | HUMICAP180RC | | | | | | 2 | | | | | | | | | | |
| 7 | Heating options | None | | | | | | | | Α | | | | | | | | | |
| 8 | Chemical purge | None | | | | | | | | | 0 | | | | | | | | |
| | | Manual purge with MI70 (only with composite sensor) | | | | | | | | | 4 | | | | | | | | |
| 9 | Sensor protection | Sintered Teflon filter | | | | | | | | | | Α | | | | | | | |
| | | Membrane filter | | | | | | | | | | В | | | | | | | |
| 10 | Probe cable length | No cable (no counter connector) | | | | | | | | | | | 0 | | | | | | |
| 11 | Additional Temperature probe | None | | | | | | | | | | | | Α | | | | | |
| | | Additional T-probe with 2m cable | | | | | | | | | | | | В | | | | | |
| | Calibration | At room temperature | | | | | | | | | | | | | 1 | | | | |
| 13 | PC-Accessories | MI70 connection cable | ltem:221801 | | | | | | | | | | | | | С | | | |
| 14 | Installation | PTB330TS | | | | | | | | _ | | | | | | | 4 | | |
| 15 | (For production use only) | | | | | | | | | | | | | | | | | Α | |
| | - | | | | | | | | | | | | | | Т | otal v | alue | | |

Selections in bold are included in the price of the basic version

Example of order code with typical settings:

| HMP155 E 1 A A 1 1 A 0 A 0 A 1 C 4 A | | | | , . | | | | | | | | | | | | |
|--------------------------------------|--------|---|---|-----|---|---|---|---|---|---|---|---|---|---|---|---|
| | HMP155 | Ε | 1 | A | A | 1 | 1 | A | 0 | A | 0 | A | 1 | С | 4 | Α |

Selections in italic are available at an extra cost