

TKG-083-TB38-MODUL-SILVER



Esis Pty Ltd
Ph 02 9481 7420
Fax 02 9481 7267
www.esis.com.au



Features and benefits:

- Carbon-on-gold switching elements
- Positive tactile feedback
- PS/2 and USB compatible
- Panel-mount version
- Special Dura-coating on keys for excellent mechanical and chemical resistance
- Ergonomic design
- IP65 sealing, water and dust proof
- 10 million operations per key
- Semi- or full customisation available
- Activation force 1.2 N / key travel 1.2 mm
- Low cost alternative for stainless steel keyboards

Specification Keyboard

Number of Keys: 83
 Keyswitch Technology: carbon-on-gold contact
 Actuation Force/-Travel: 1.2 N / 2 mm
 Keyswitch Lifetime: 10 mil. operations
 Protection Level: IP65; NEMA 4x
 Mounting Type: panel mount
 Dimensions: 405 x 134 x 45 mm
 15.94" x 5.27" 1.77"
 Weight: 650 g
 Operating Temperature: -40 °C to 90 °C;
 -40 °F to +194 °F
 Frontplate Material: aluminium (anodized)


Specification Trackball

Ball Diameter: 38 mm (1.5")
 Actuation Force: 50 g
 Trackball Lifetime: > 6 mil. revolutions
 Protection Level: IP65 static,
 IP54 dynamic
 NEMA 3

Cat.-No.	Product Name
KG00205	TKG-083-TB38-MODUL-SILVER PS/2; US-Layout
KG00207	TKG-083-TB38-MODUL-SILVER USB; US-Layout
Other language versions/interfaces/configuration available on request	

Reverse side screwing studs M3x10 (8x)

Frontpanel cutout: 386 x 116 mm
Mounting depth: 30 mm

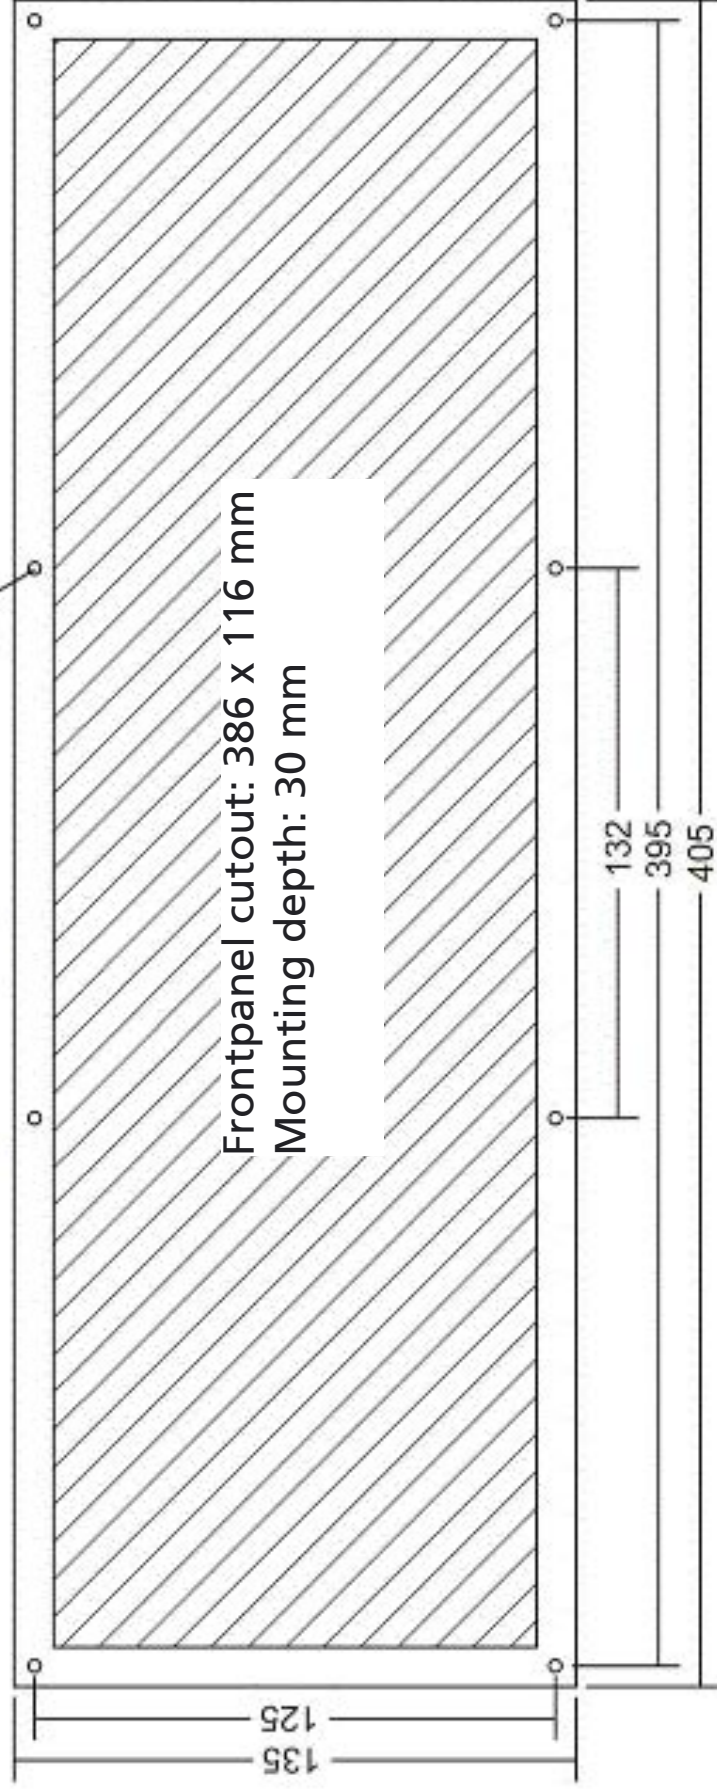

Tolerances: DIN ISO 2768 T1-m